


WIZARA YA ELIMU, SAYANSI NA TEKNOLOJIA
CHUO CHA UALIMU MONDULI

S.L.P 5, **MONDULI**.
Simu: +255 (0)27 2538026
Fax +255 (0)27 2538060



Web: www.mondulitc.ac.tz
Email: [<mondulitc@gmail.com>](mailto:mondulitc@gmail.com)

Kumb. Na: MON/TC/GF15/166

03/02/2022

Bw. Alexander Shayo.

YAH: KUSHINDA KAZI YA ZABUNI

Ndugu husika na mada tajwa hapo juu.


Napenda kukupa taarifa kuwa, kutokana na tendo la usahili lililofanyika katika Chuo cha Ualimu Monduli tarehe **29/01/2022**, lililoendeshwa na kamati ya Ujenzi ya Chuo, ulishinda kazi ya kukiuzia Chuo vifaa mbalimbali vya Ujenzi.

Aidha kamati inakupongeza kwa ushindi huo na inakushauri kufanya kazi kwa mujibu wa Makubaliano/ Mkataba ili kuongeza ufanisi katika kazi yako.

Hivyo utapigiwa simu muda wowote kuanzia sasa kwa ajili ya kujaza mkataba na kuanza kazi.

Mwisho tunakutakia kazi njema.

Wako katika Ujenzi wa Taifa.


Prof. Samwel M. Iira
MKUU WA CHUO

WIZARA YA ELIMU, SAYANSI NA TEKNOLOJIA

CHUO CHA UALIMU MONDULI



MKATABA WA MANUNUZI KWA SUPPLIER

A: MASHARTI MAALUM YA MKATABA

1	MWAJIRI	MKUU WA CHUO CHUO CHA UALIMU MONDULI S. L. P. 5, MONDULI KNY: KATIBU MKUU WIZARA YA ELIMU SAYANSI NA TEKNOLOJIA
2	JINA NA ANWANI YA SUPPLIER (Mwajiriwa)	Jina: <i>ALEXANDER ROCKY SHAYO</i> Anwani: <i>SLP 2 MONDULI</i> Simu: <i>0755-324815</i>
3	ENEO LA UJENZI	CHUO CHA UALIMU MONDULI
4	MAELEZO YA KAZI KWA UFUPI	KAZI YA HUDUMA YA KULETA VIFA VYA UJENZI KAMA VILIVYO ORODHESHA KWENYE KIAMBATA
5	GHARAMA YA KAZI	MALIPO YATAFANYIKA KULINGANA NA CALL OF ORDER
6	MUDA WA MKATABA (Tangu Kusainiwa kwa Mkataba):	Tarehe ya Kusaini. <i>29/01/2022</i> Muda: 180 - SIKU Tarehe ya Kuanza Kazi. <i>29/01/2022</i> Tarehe ya Kumaliza Kazi. <i>29/07/2022</i>
7	MASHARTI YA MALIPO:	<ul style="list-style-type: none">• Hakuna Malipo ya Awali• Supplier atalipwa baada ya kuwasilisha vifa sehemu husika (site), kukaguliwa na kuridhishwa

B: MASHARTI YA JUMLA YA MKATABA

1. Kuhakikisha mzabuni analeta vifaa kulingana na call of order.
2. Kuhakikisha mzabuni analeta vifaa kulingana na bei zilizo kubalika.
3. Kuhakikisha mzabuni analeta vifaa ndani ya muda uliyopangwa.
4. Mzabuni ana paswa kuleta nyaraka zote muhimu za madai ili kukamilisha mchakato wa malipo.
5. Mzabuni akishindwa kutoa huduma kwa mujibu wa mkataba unavyojieleza, mkataba una weza kubatilishwa /kusitishwa.

MWAJIRI:

Saini: 

Jina: SAMWEL M. IRIRA

SIMU: 0763559333

Cheo: MKUU WA CHUO

Tarehe: 29/01/2022

SHAHIDI WA MWAJIRI

Saini: 

Jina: LAMON M. MTWEVE

SIMU: 0753-026651

Cheo: MAKAMU WA MKUU WA CHUO

Tarehe: 29/01/2022

SUPPLIER:

Saini: 

Jina: Alexander Rocky Shig

SIMU: 0755-324415

Cheo: MTOA HUDUMA

Tarehe: 29/01/2022

SHAHIDI WA SUPPLIER


Saini: 

Jina: Mottamed Omar


SIMU: 0755 744 883

Cheo: MTOA HUDUMA MSAIDIZI


Tarehe: 29/01/2022

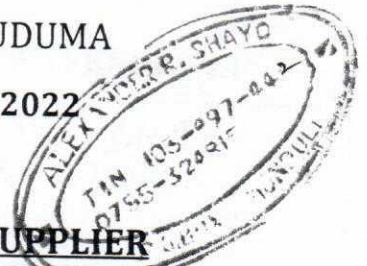


ITEM	DESCRIPTION	UNITY	QNT	RATE	AMOUNT
	A: SUBSTRUCTURE				
3	230mm plain insitu concrete base nominal mix (1:3:6)				
	cement 42.5N	Bag	92	16,000	1,472,000
	sand	m ³	9	38,000	342,000
	Aggregates 1"	m ³	18	83,500	1,503,000
					-
4	Reinforced concrete grade 20				
	columns footings	m ³	1		-
	cement 42.5N	Bag	4	16,000	64,000
	Sand	m ³	-	38,000	-
	Aggregates	m ³	1	83,500	83,500
					-
	Reinforced concrete grade 20				
	Starter columns	m ³	0		-
	cement 42.5N	Bag	1	16,000	16,000
	Sand	m ³	-	38,000	-
	Aggregate	m ³	-	83,500	-
					-
	Reinforcement				
	Y8	pcs	1	15,500	15,500
	Y12	pcs	4	28,000	112,000
					-
	Sawn Formwork to				
	Sides and Soffit of beams 25x250mm	Pcs	6	18,000	108,000
	Timber for shuttering 50x100mm	Pcs	3	14,500	43,500
	Assorted steel wire nails	Kgs	5	3,800	19,000
					-
3	Construction of foundation wall	m2	367		-
	Blocks	No.	5,131	2,200	11,288,200
	cement 42.5N	Bag	103	16,000	1,648,000
	Sand	m ³	9	38,000	342,000
					-
4	Gravel fill to make up levels				
	200mm thick Selected earth filling well compacted in layers to engineer's satisfaction to receive hardcore	m3	70	23,000	1,610,000
					-
	Damp-proof Courses				
	1000 Gauge Hessian based damp proof course; 230mm wide laid horizontal with 150mm laps	m	253	2,800	708,400
					-
5	Hardcore filling				
	150mm bed of consolidated stones compacted, levelled and blinded to receive polythene membrane(measured separately)	trip	12	120,000	1,440,000
					-
6	Soil stelization				
	Adrian 5% solution applied at a rate of 7 litres/m2 to hardcore bed or other ant-termites treatment approved by the Engineer	Tins	5	50,000	250,000
					-
	Ditto at a rate of 8 litrs/m per 300mm deep per 230mm wide to backfilling to one side of wall foundation	Tins	5	50,000	250,000
					-
7	Plain Insitu Concrete Slab grade C nominal mix 1:3:6				
	100mm Oversite Concrete and 230x230mm ground beams				
	cement 42.5N	Bags	183	16,000	2,928,000
	Sand	m3	20	38,000	760,000
	Aggregate .1"	m3	35	83,500	2,922,500
					-
8	Reinforcement				
	Y8	pcs	105	15,500	1,627,500
	Y12	pcs	84	28,000	2,352,000
	Binding wire	Rolls	1	90,000	90,000
					-




9	Sawn Formwork to				-
	Sides and Soffit of beams 25x250mm	Pcs	38	17,000	646,000
	Timber for shuttering 50x100mm	Pcs	20	14,500	290,000
	Assorted steel wire nails	Kgs	10	3,800	38,000
					-
10	Damp proof Membrane				-
	500mm Gauge polythene damp proof membrane laid on blinded hardcore	m2	425	2,800	1,190,000
					-
					-
11	15mm thick rendering in two coats steel trowelled to smooth finish (1:4)				-
	cement 42.5N	Bags	4	16,000	64,000
	Sand	m3	1	38,000	38,000
					-
12	Bituminous Paint				-
	Prepare and apply two coats of black bituminous paint on rendered or concrete surfaces				-
	black bituminous TIN 4 Litre @	Tins	4	24,000	96,000
					34,357,100



Subtotal carried to General Summary (A)					
ITEM	DESCRIPTION	UNIT	QNT		
B: SUPERSTRUCTURE					
8	Solid concrete blocks to BS 2028 type A in cement mortar				
	150mm wall: Number of Blocks	No	9,613	2,200	21,148,600
	Cement for Mortar	Bags	192	16,000	3,072,000
	Sand	m3	10	38,000	380,000
-					
9	Ring beam				
	Vibrated 150x230mm cross section Reinforced insitu concrete beam grade "20" nominal mix 1:2:4				
	cement 42.5N	Bags	61	16,000	976,000
	Sand	m3	5	38,000	190,000
	Aggregates 1"	m3	9	83,500	751,500
					-
	Reinforcement				
	Y8	pcs	105	15,500	1,627,500
	Y12	pcs	84	28,000	2,352,000
-					
9	Columns				
	cement 42.5N	Bags	3	16,000	48,000
	Sand	m3	-	38,000	-
	Aggregates 1"	m3	-	83,500	-
					-
	Reinforcement				
	Y8	pcs	3	15,500	46,500
	Y12	pcs	3	28,000	84,000
-					
	Sawn Formwork to				
	Sides and Soffit of beams 25x250mm	Pcs	66	18,000	1,188,000
	Timber for shuttering 50x100mm	Pcs	25	14,500	362,500
	Assorted steel wire nails	Kgs	30	3,800	114,000
	Linseed oil	Lts			-
Subtotal carried to General Summary (B)					32,340,600
C: Roofing Structure					
9	Treated timber				
	Wall plate 50x100mm	Ft	493	950	468,350
	King post 50 x150mm	Ft	303	1,350	409,050
	Tie beam 50x150mm	Ft	1,120	1,350	1,512,000
	Rafters 50x150mm	Ft	1,253	1,350	1,691,550
	Struts 50x100mm	Ft	2,007	950	1,906,650
	Purlins 50x75mm	Ft	1,700	700	1,190,000
	Fascia board 25x250mm (Approved hardwood)	Ft	543	1,800	977,400
	Assorted steel wire nails	Kg	150	3,800	570,000
	ALAF Galvanised sheets G28 IT 5	m2	582	22,000	12,804,000
	ALAF Galvanised ridge cape	Pcs	16	27,000	432,000
	ALAF Galvanised Valley cape	Pcs	32	27,000	864,000
	Roofing nails	Pkts	22	7,000	154,000
Subtotal carried to General Summary (C)					22,979,000
E: WINDOWS					
11	Aluminium Windows complete with glass				
	1400 x 1500mm high	m2	42	163,000	6,846,000
	2000 x 600 mm high; (4 Nos)	m2	5	163,000	815,000
Subtotal carried to General Summary (E)					7,661,000

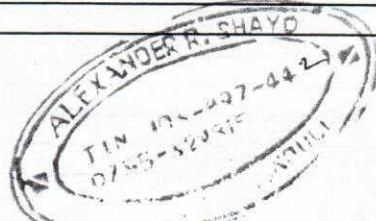


12	F: FINISHING				
	FLOOR FINISH -SCREED				
	40mm cement and sand screed (1:4) steel trowelled surface finish				
	Cement 42.5N	Bags	95	16,000	1,520,000
	Sand	m3	16	38,000	608,000
					-
	FLOOR FINISH: TILES				-
	Porcelain floor tiles laid on 5mm thick cement and sand mortal (1:3), joint grouted with matching in colour material laid in approved pattern (size 300x300mm)	Box	58	22,000	1,276,000
	Porcelain wall tiles laid on 5mm thick cement and sand mortal (1:3), joint grouted with matching in colour material laid in approved pattern (size 200x300mm)	Box	117	16,000	1,872,000
	Skirting tiles of 600mm long	Box			-
	Grout material, matting in colour with the tiles (montana)	Bags	10	4,000	40,000
	Cement 42.5N	Bag	23	16,000	368,000
	Sand	m3	3	38,000	114,000
	Metal strips	Nr.	30	6,000	180,000
					-
	Internal and External Plastering 1:4				-
	Cement 42.5N	Bags	199	16,000	3,184,000
	Sand	m3	28	38,000	1,064,000
					-
	Ramp construction and finishing				-
	Cement and sand blocks	No	150	2,200	330,000
	Cement 42.5N	Bags	19	16,000	304,000
	Sand	m3	2	38,000	76,000
					-
	Ceilling board				-
	Gypsum boards (BBG)	No	147	17,000	2,499,000
	Branding (treated)	Ft	4,665	600	2,799,000
	Assorted steel wire nails	Kg	80	3,800	304,000
	Gypsum cornice	Pc	190	3,500	665,000
	Gypsum screw	Box	20	7,000	140,000
	Fibre tapes	Rolls	20	4,000	80,000
	Subtotal carried to General Summary(F)				17,423,000
15	Decoration (Painting) (G)				
	Wash and wear paint	Bukts	8	153,000	1,224,000
	Emulsion paint	Bucket	13	33,000	429,000
	Gross oil paint	Tin	4	22,500	90,000
	Solvent	Tin	5	24,000	120,000
	Bitmen Black	Tin			-
	Gypsum powder	Bags	56	19,000	1,064,000
	Primer	Bkts	2	35,000	70,000
	Sand papers	Pcs	150	1,200	180,000
	Cement 42.5N	Bags	33	16,000	528,000
	Sand	m3	7	38,000	266,000
	Subtotal carried to General Summary(G)				3,971,000
	H: ELECTRICAL INSTALLATION				
	tale wire 6mm	mtr	30	5,800	174,000
	Distribution board 6 way		1	90,000	90,000
	Wire 4 mm single	mtr	20	2,500	50,000
	Bracket		1	40,000	40,000
	Bracket bolts (galvanized)		2	4,500	9,000
	Tronic Switch 1 gang 2 way		4	4,000	16,000
	Havells Consumer Unit 8Way SP DHDIN007	PCS	1	105,000	105,000
	Tronic Circuit Breaker 63A/300mA SP NEW MC CHRC-63-02-301	PCS	1	48,000	48,000
	Cutout 100A Single with Fuse- ESTIA/TRONIC EST CUSP-01	Pcs	1	24,000	24,000
	Fitting Tronic Espania 4Ft Single FI TEFF-03	PCS	41	8,000	328,000
	Tube Tronic 4Ft Espania TU T836-DL	PCS	41	6,500	266,500
	Tronic 2G 1W Switch TR5121	PCS	2	4,300	8,600
	Tronic 1G 1W Switch TR5111	PCS	22	3,000	66,000

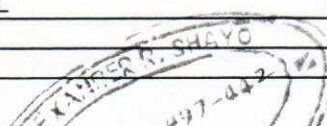

 K. APRES R. SHAYO
 447-442

Tronic 2G 2W Switch TR5122	PCS	4	4,500	18,000
1.5mm Single Cable GREEN Euro	ROLL	4	70,000	280,000
1.5mm Single Cable BLACK Euro	ROLL	5	70,000	350,000
1.5mm Single Cable RED Euro	ROLL	6	70,000	420,000
PVC Conduit Pipe - 20MM Tronic CP PIPE-20-WH (Africable)	PCS	160	2,200	352,000
Pvl - Elbow 3/4 (20Mm) QE20	Pcs	80	450	36,000
PVC Elbow - 20MM Tronic CP BEND-20-WH	PCS	80	800	64,000
Qpl - Tee 3/4 (20Mm) QT20	Pcs	80	500	40,000
PVC Coupler - 20MM Tronic CP COUP-20-WH	PCS	80	450	36,000
PVC Saddle W/Base - 20MM Tronic CP SADD-20-WH	PCS	80	300	24,000
PVC Junction Box 4 Way WHITE - 20MM Tronic CP JUN4-20-WH	PCS	40	700	28,000
PVC Junction Box 3 Way WHITE - 20MM Tronic CP JUN3-20-WH	PCS	40	700	28,000
PVC Junction Box 2 Way WHTE - 20MM Tronic CP JUN2-20-WH	PCS	25	700	17,500
Tronic Round Cover TRRC	PCS	80	1,500	120,000
Box G.I Single 3x3 1Mm Tronic TR 2331	PCS	30	2,400	72,000

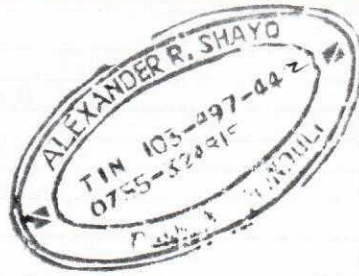

Tronic 13A Switch Socket Twin TR5213	PCS	4	11,000	44,000
2.5mm Single Cable GREEN Euro	ROLL	2	96,000	192,000
2.5mm Single Cable BLACK Euro	ROLL	2	96,000	192,000
2.5mm Single Cable RED Euro	ROLL	2	96,000	192,000
Box G.I Twin 3x6 1Mm Tronic TR 2361	PCS	4	2,800	11,200
Earth Rod (Pure Copper) 16Mm Big ER 15MM	PCS	1	43,000	43,000
10mm Single Cable GREEN	mtr	20	8,000	160,000
Insulating Tape Black - Tronic IT 01BK	PCS	4	1,500	6,000
solution tape		10	-	-
metal clips	box	3	-	-
saddle clips	box	4	6,500	26,000
				3,976,800
J: PLUMBING INSTALLATIONS				
PVC pipe 4" Class B		20	40,000	800,000
PVC pipe 1 1/2 Class B		20	10,500	210,000
gate valve 3/4		12	14,000	168,000
PVC Bend plain with door 4" Class B	pc	20	3,800	76,000
PVC Bend plain without door 4" Class B	pc	8	4,800	38,400
PVC elbow 4" Class B		20	4,300	86,000
PVC tee 4" Class B	pc	8	6,500	52,000
PVC cement Class B (1/2kg)		40	8,000	320,000
stop cock 3/4		12	16,000	192,000
PVC elbow 1 1/2 Class-B	pc	40	1,500	60,000
PVC Tee 1 1/2 Class B		40	1,500	60,000
PVC vent cap 4" Class B	pc	8	2,500	20,000
PVC p trap 4" Class B	pc	12	9,500	114,000
Reducing bush 3/4 - 1/2		40	1,500	60,000
Reducing bush 1 - 3/4		30	2,000	60,000
Nipple 1/2		50	1,200	60,000
Thread seal tape	roll	40	800	32,000
IPS pipe 1/2	pc	20	12,000	240,000
IPS pipe 3/4	pc	12	19,000	228,000
IPS pipe 1"	pc	4	32,000	128,000
IPS Elbow 1/2"	pc	40	1,200	48,000
IPS tee 1/2	pc	40	1,500	60,000
IPS M/F 1/2		40	1,500	60,000
IPS union 3/4	pc	40	4,500	180,000
IPS elbow 3/4	pc	80	1,800	144,000




IPS tee 3/4	pc	100	2,000	200,000
IPS elbow 1"		40	2,800	112,000
IPS Tee 1"	pc	20	4,000	80,000
IPS Nipple 1/2	pc	40	1,200	48,000
IPS Nipple 3/4	pc	40	1,800	72,000
IPS Nipple 1"	pc	20	2,800	56,000
IPS Socket 1/2	pc	40	1,200	48,000
IPS Socket 3/4	pc	20	1,800	36,000
Stop cock 3/4		12	16,000	192,000
gate valve 3/4		12	15,000	180,000
Bib cock 3/4"		12	14,000	168,000
sanit tank		1	65,000	65,000
washing basin		8	230,000	1,840,000
Toilet sink (European)		1	240,000	240,000
Toilet sink (Asian)		5	25,000	125,000
Clamp 4"		40	2,000	80,000
Shattaph		2	12,000	24,000
IPS union 1"		20	6,000	120,000
Pvc cape		12	2,500	30,000
Reducing bush 1 1/2- 1		20	6,000	120,000
Pvc plug 1 1/2		20	2,000	40,000
Bottle trap 1 1/4		10	15,000	150,000
Angle valve 1/2		20	12,000	240,000
Angle valve 3/4 X 1/2		10	22,000	220,000
Gate valve 1"		10	23,000	230,000
Strainer		16	6,000	96,000
Shower rose		6	4,500	27,000
				8,335,400
MATRES				

MATRES (3ft x 6ft x 4") Tanform	No.	80	121,000	9,680,000
				9,680,000

TOOLS & EQUIPMENTS

Hoe	PCS	5	7,000	35,000
Manila rope	PCS	30	1,000	30,000
reflector	PCS	30	6,000	180,000
Helment	PCS	30	10,000	300,000
Ndoo 10L	PCS	50	4,000	200,000
safety boots	PCS	5	60,000	300,000
Axe	PCS	2	20,000	40,000
sururu	PCS	2	10,000	20,000
pipe level	PCS	3	10,000	30,000
conc cutting disk 9"	PCS	1	8,000	8,000
conc cutting disk 4"	PCS	1	6,000	6,000
Iron cutting disk 9"	PCS	3	8,000	24,000
Iron cutting disk 4"	PCS	1	6,000	6,000
nyundoya misumari	PCS	4	18,000	72,000
nyundo ya 2kg	PCS	4	30,000	120,000
makoleo	PCS	5	10,000	50,000
Store ledger	PCS	15	5,000	75,000
gum boots	PCS	15	15,000	225,000
nyundo 5kg	PCS	1	90,000	90,000
tank 5000L (3000L&2000L)	PCS	1	1,070,000	1,070,000
padlocks	PCS	2	35,000	70,000
Brush 2"	PCS	10	3,000	30,000



Brush 4"	PCS	10	5,000	50,000
panga	PCS	3	25,000	75,000
tindo	PCS	2	10,000	20,000
Roller brush 9"	PCS	6	4,000	24,000
Drilling bit 12 mm	PCS	2	15,000	30,000
Drilling bit 10 mm	PCS	2	12,000	24,000
Drilling bit 8 mm	PCS	2	10,000	20,000
Drilling bit 5 mm	PCS	2	6,000	12,000
Drilling bit 4 mm	PCS	2	3,000	6,000
Drilling bit 16mm	PCS	1	20,000	20,000
Screw driver	PCS	4	5,000	20,000
Timber saw	PCS	10	15,000	150,000
Bending Spring 25Mm For Conduit	PCS	3	25,000	75,000
Bending Spring 20Mm For Conduit	PCS	3	25,000	75,000
Hose pipe (50m)	Roll	2	120,000	240,000
				3,874,500
TOTAL MATERIALS COST				144,598,400

